


EAX® EXIT ALARMS

EAX-300W

Battery Powered Weatherized Door Propped Alarm

The Detex EAX-300W Series is designed for applications where doors that open to the outdoors or wet environments may be used for egress or ingress, but may not be held or propped open. Door open times from 1 second to 4 minutes (15 second default) are field selectable. The smaller size makes installation quick and easy on doors or gates.

Shown with mortise cylinder
(cylinder sold separately)



Benefits

- Low cost, solution to propped open doors
- Helps keep energy costs down by ensuring doors are closed
- Alarm silences when door is closed, no waiting for key-holder to arrive
- Weatherized for use on gates or doors that are subjected to inclement weather
- Quick, easy installation saves time and money

Features

- Secure, tamper resistant housing
- Tapered cover allows for installation on narrow stile doors, 2" minimum
- 100 dB piezo alarm
- Patented plastic template assures accurate installation by providing foolproof alignment with internal magnetic door contact
- Intelligent circuit senses the external magnet location automatically and sets the correct door handing
- 9VDC battery operated with Low Battery Alert
- Weatherized electronics certified to driving rain and salt fog test (see Listings & Approvals)
- LED visual arming indicators

Mechanical Options

- KS - Key Stop, factory installed (always armed when key removed)
- SI - Status Indicator On

Accessories

- MC65 - Mortise Cylinder
- IC7 - 7 pin IC Cylinder Housing
- IK7 - Cylinder InstaKey Housing
- Optional Cylinder Nut Wrench
P/N: 103779



Electrical Options

Other EAX Door-Proppped Alarms (non Weatherized) Include:

- EAX-300 - Battery Powered

Other EAX Exit Alarms (non Weatherized) Include:

- EAX-500 - Battery Powered
- EAX-2500 - AC Powered
- EAX-3500 - Timed Bypass and Rechargeable Battery

Other Weatherized EAX Exit Alarms Include:

- EAX-500W - Battery Powered, Timed Bypass

Technical Information

• Door Types - Wood, Hollow Metal, Fiberglass or Aluminum

• Inswinging door/gate applications use accessory PN 102644 (Inswing Door Kit)

• Machine and self-drilling screws



Finishes

• GY - Grey


• BK - Black

Dimensions


Front and Side View

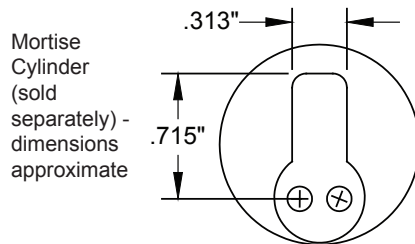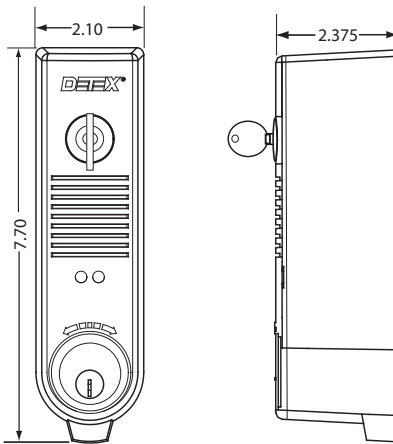

Riser Diagram

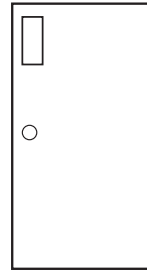

Left-side mounting

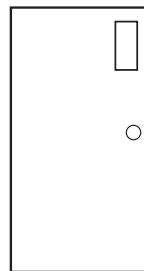

Right-side mounting

Detex Limited Warranty

3 Year Limited Manufacturers Warranty

Listings and Approvals



"UL Listed Miscellaneous Fire Door Accessory"

MIL-STD 810F, Method 506.4 (Driving Rain Test)

MIL-STD 810F, Method 509.4 (Salt Fog Test)



ANSI/BHMA A156.29

Where Trust is Built™
DETEX®
 Life Safety and Security Door Hardware

Detex Corporation
 302 Detex Drive
 New Braunfels, Texas 78130-3045 USA
 PH. (830) 629-2900
 (800) 729-3839
 FAX (830) 620-6711
 (800) 653-3839
<http://www.detex.com>
 USA Sales:
marketing@detex.com
 International Sales:
export@detex.com