ROTON ELECTRICAL MODIFICATIONS

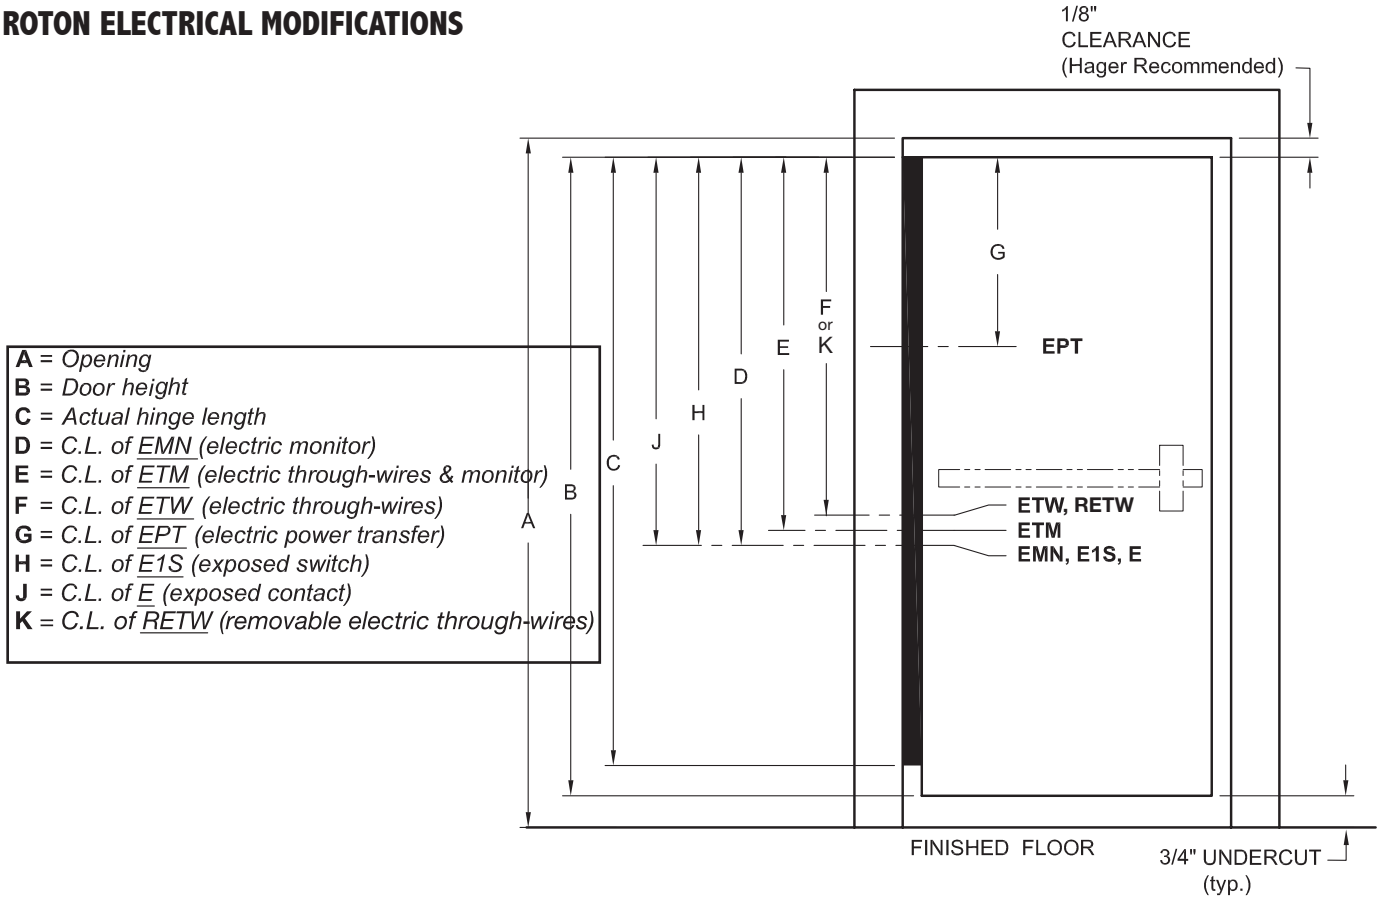

For ease of ordering, Hager Companies has established standard locations for power transfer cutouts. All standard location dimensions are referenced from the top edge of the door to the centerline of the power transfer cutout. Please specify handing.

NOTE: Full surface hinges are not available with preps.

	Opening	Door Height	Actual Hinge Length	EMN	ETM	ETW	EPT	E1S	E	RETW
79 SD	80″	79-1/8″	78-11/16″	42-12″	41-1/4″	40″	24-3/16″	42-1/2″	42-1/2″	–
79 HD	80″	79-1/8″	78-11/16″	42-1/2″	40-7/16″	38-3/4″	24-3/16″	42-1/2″	42-1/2″	41-7/8″
83 SD	84″	83-18″	83″	46-1/2″	43-7/8″	42-3/4″	28-7/16″	46-1/2″	46-1/2″	–
83 HD	84″	83-1/8″	83″	46-1/2″	45-1/8″	44″	28-7/16″	46-1/2″	46-1/2″	44-1/16″
85 SD	86″	85-1/8″	85″	48-1/2″	47-1/4″	46″	30-7/16″	48-1/2″	48-1/2″	–
85 HD	86″	85-1/8″	85″	48-1/2″	47-13/16″	44-3/4″	30-7/16″	48-1/2″	48-1/2″	45-1/16″
95 SD	96″	95-1/8″	95-1/16″	59-3/4″	56-7/8″	56″	40-1/2″	59-3/4″	59-3/4″	–
95 HD	96″	95-1/8″	95-1/16″	59-3/4″	56-7/8″	56″	40-1/2″	59-3/4″	59-3/4″	56-1/2″
119 SD	120″	119-1/8″	119″	83-3/4″	80-13/16″	80″	64-3/8″	83-3/4″	83-3/4″	–
119 HD	120″	119-1/8″	119″	83-3/4″	80-13/16″	80″	64-3/8″	83-3/4″	83-3/4″	80″

SD = Standard Duty HD = Heavy Duty

HAGER COMPANIES

ROTON ELECTRICAL MODIFICATIONS

Part Number	Von Duprin EPT 2 or EPT 10 Power Transfer Preparation EPT	Exposed Electric Contacts E	Exposed Electric Switches E1S	Concealed Electric Through-Wire ETW	Concealed Electric Monitoring EMN	Concealed Electric Through-Wire and Monitoring ETM	Removable Electric Through-Wire RETW
780-045HD	•						
780-046HD	•						
780-053	•						
780-053HD	•						
780-054HD	•						
780-110HD			•				
780-111	•	•	•	•	•	•	
780-111HD	•	•	•	•	•	•	•
780-111LL	•	•	•	•	•	•	
780-112	•	•	•	•	•	•	
780-112HD	•	•	•	•	•	•	•
780-112LL	•	•	•	•	•	•	
780-124HD	•	•	•	•	•	•	•
780-124LL	•	•	•	•	•	•	
780-224	•	•	•	•	•	•	
780-224HD	•	•	•	•	•	•	•
780-224LL	•	•	•	•	•	•	
780-226HD	•	•	•	•	•	•	•
780-226LL	•	•	•	•	•	•	
780-235HD				•			
1200-600	•			•			
1200-650	•			•			

STANDARD LOCATIONS FOR ALL STAINLESS STEEL CONTINUOUS ELECTRICAL MODIFICATIONS
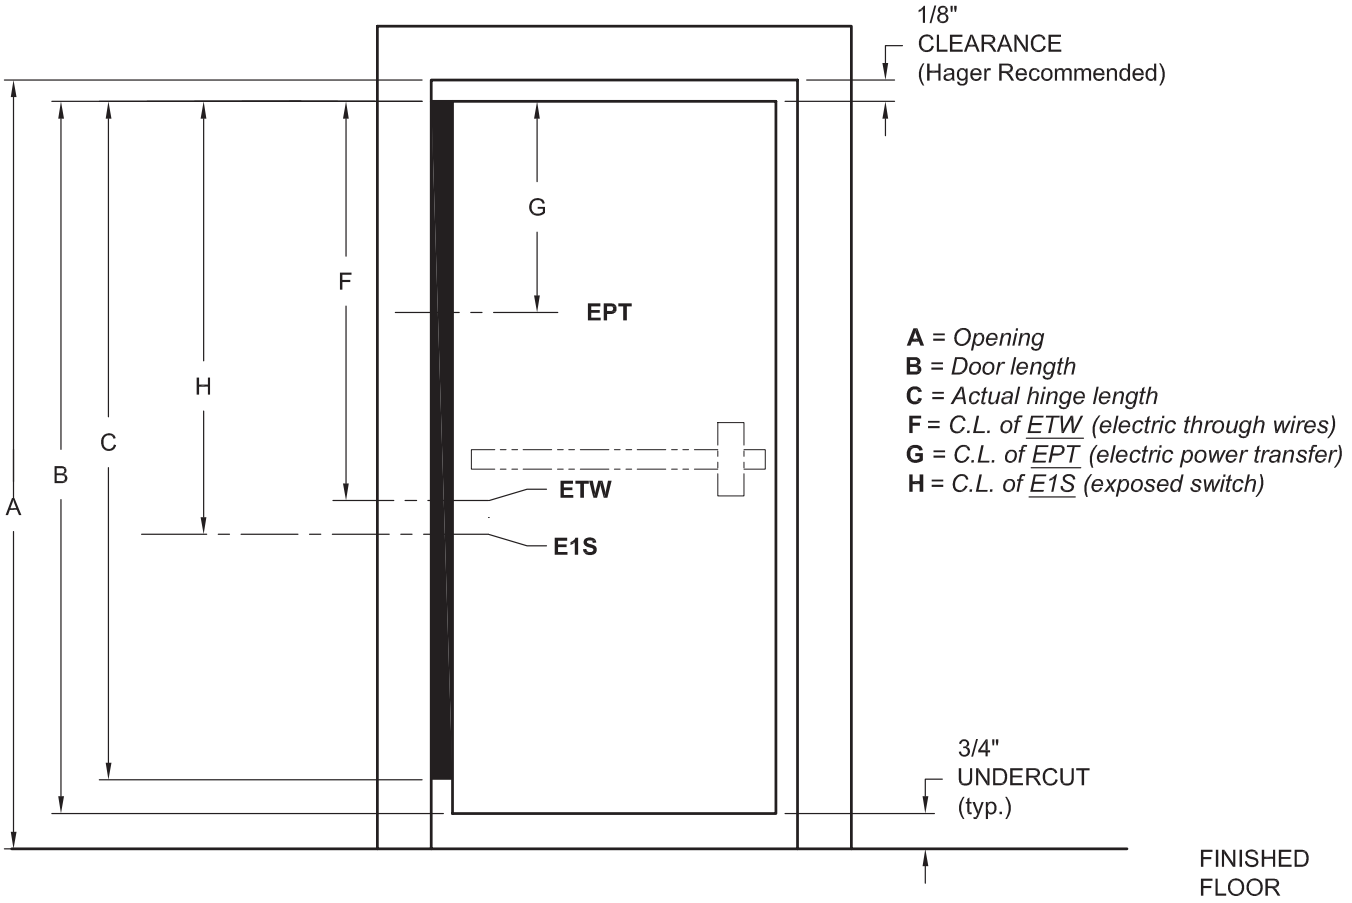
	79”	83”	85”	95”	119”
Opening	80”	84”	86”	96”	120”
Door Height	79-1/8”	83-1/8”	85-1/8”	95-1/8”	119-1/8”
Hinge Length	79-3/16”	83-1/8”	85-1/8”	95”	118-3/4”
ETW	41-1/2”	43-1/2”	45-1/2”	55-3/8”	79-1/8”
EPT	24-1/2”	28-7/16”	30-7/16”	40-1/2”	64-7/16”
E1S	41-1/2”	43-1/2”	45-1/2”	55-3/8”	79-1/8”