



28103

120° Template Top Jamb Push Side Mounting

Installation Instructions

1 Locate proper template. Center punch all hole locations. For self reaming tapping screws (SRT) drill 1/8" pilot holes.

NOTE: MOST 4040XP TOP JAMB INSTALLATIONS REQUIRE A PLATE. (SEE REVERSE SIDE OF SHEET FOR TEMPLATING.)

*** Locate closer & shoe from centerline of pivot or swing clear hinge pin when used.**

FLUSH HEADER OR SINGLE RABBETED FRAME MOUNT REQUIRES 3 1/2" FRAME FACE

Left hand application
Application main gauche
Aplicación para mano izquierda.

Right hand application
Application main droite
Aplicación para mano derecha.

SRT Screw Reduce installation torque if using SRT screws in wood. The use of wood screws is recommended for wood.

(Fig. 61)
4040XP EN 1-5

2 Determine door width, adjust spring power to match chart.

CAUTION
IMPROPER INSTALLATION OR REGULATION MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE. FOLLOW ALL INSTRUCTIONS CAREFULLY FOR QUESTIONS, CALL LCN AT 877-667-7011

DOOR WIDTH	LCN FAST™ Power Adjust	
INTERIOR	EXTERIOR	SET TO:
34"	8.5 lb-f	1
38"	30"	2
48"	36"	3
54"	42"	4
60"	48"	5
		6

LCN FAST™ Power Adjust for Spring Power Adjustment

3 Secure closer and forearm with fasteners provided.

I Optional Hold-open arm. Identify direction of hold-open nut according to mounting.

4

I Mount arm on shaft at 100° to closer, as shown.

II Attach arm to closer, insert rod into arm tube.

III Pre-load arm to 90°. Fasten with screw provided.

Note: Hold open arms must not be installed on fire rated doors.

5 If necessary, adjust closer.

NOTE: A "Normal" closing time from 90° open position is 5 to 7 seconds, evenly divided between main speed and latch speed.

CAUTION
OPENING OF REGULATION VALVES TOO FAR MAY RESULT IN LEAKAGE OF CLOSER. PERSONAL INJURY OR PROPERTY DAMAGE. FOLLOW ALL INSTRUCTIONS CAREFULLY.

NO MAINTENANCE REQUIRED

II Optional 4041 Delay

- Backcheck
- Main Speed
- Latch Speed
- Delay Speed

III To adjust Optional Hold-open arm: Loosen hold open nut. Open door to desired position and tighten hold open nut securely.

6 Snap on cover.

Note: Use screws for metal cover only.

4040XP Instructions et gabarit de 120° pour une installation sur le linteau du côté à pousser.

1 Repérez le gabarit approprié. Marquez le centre de tous les trous. Percez des trous de guidage de 1/8" pour les vis tarauds.

2 Mesurez la largeur de la porte. Réglez le ressort selon les indications du tableau.

3 Fixez le ferme-porte et l'avant-bras avec les attaches fournies.

4 Montez le bras sur la tige à 100° du du ferme-porte, comme sur l'illustration.

5 Au besoin, réglez

- résistance d'ouverture
- vitesse de fermeture
- vitesse de verrouillage

6 Fixez le couvercle.

NOTE: la fermeture d'une porte ouverte à 90° prend normalement de 5 à 7 secondes, ce délai est réparti entre la vitesse de fermeture et la vitesse de verrouillage.

III Pour régler le bras de retenue optionnelle, desserrez la vis de retenue. Ouvrez la porte à la position désirée et resserrez la vis.

DANGER
Une installation ou un réglage inadéquats peuvent entraîner des blessures ou des dommages. Veuillez suivre toutes les instructions avec soin. Pour plus de renseignements, composez le 877-671-7011

DANGER
UNE OUVERTURE EXAGÉRÉE DES SOUPAPES DE RÉGLAGE PEUT ENTRAÎNER DES FUITES, DES BLESSURES OU DES DOMMAGES. VEUILLEZ SUIVRE LES INSTRUCTIONS AVEC SOIN.

4040XP Instrucciones para plantilla 120° con montaje en la parte superior de la jamba, del lado del empuje.

1 Localice la plantilla apropiada. Marca el centro de cada agujero. Barrena agujeros pilotos de 1/8" para los tornillos autorroscantes.

2 Determina la anchura de la puerta. Ajusta la fuerza del resorte según lo indicado en el gráfico.

3 Sujeta el cerrador y el antebrazo con los sujetadores ya incluidos.

4 Monte el brazo en el eje a 100° del cerrador, tal como se muestra.

5 Ajusta si es necesario.

- resistencia de apertura
- velocidad principal
- velocidad de seguro

6 Encaje la tapa.

Nota: La mayoría de las instalaciones 4041 en la parte superior de la jamba necesitan una placa. (Ver al verso de la hoja para las plantillas)

Nota: El tiempo de cerrado "Normal" de una puerta abierta a 90° es de 5 hasta 7 segundos, dividido igualmente entre la velocidad principal y la velocidad de seguro.



III Para ajustar el brazo de retenue opcional: Afloja la tuerca de retenue. Abra la puerta a la posición deseada y aprieta bien la tuerca de retenue.

ADVERTENCIA
UNA INSTALACIÓN O UN AJUSTE INCORRECTOS PUEDEN RESULTAR EN DAÑO PERSONAL O MATERIAL. SIGA BIEN TODAS LAS INSTRUCCIONES. PARA MÁS INFORMACIONES, LLAMA A LCN AL 877-671-7011

ADVERTENCIA
LA APERTURA DEMASIADO GRANDE DE LAS VÁLVULAS DE AJUSTE PUEDE OCASIONAR UN DERRAME, DAÑO PERSONAL O MATERIAL. SIGA BIEN TODAS LAS INSTRUCCIONES.



TOP JAMB MOUNTED ON 4040-18TJ ADAPTER PLATE


* Locate drop plate & shoe from centerline of pivot or swing clear hinge pin when used.

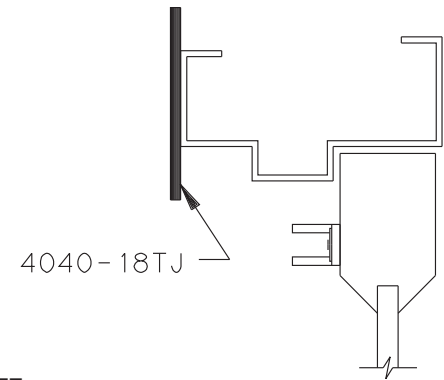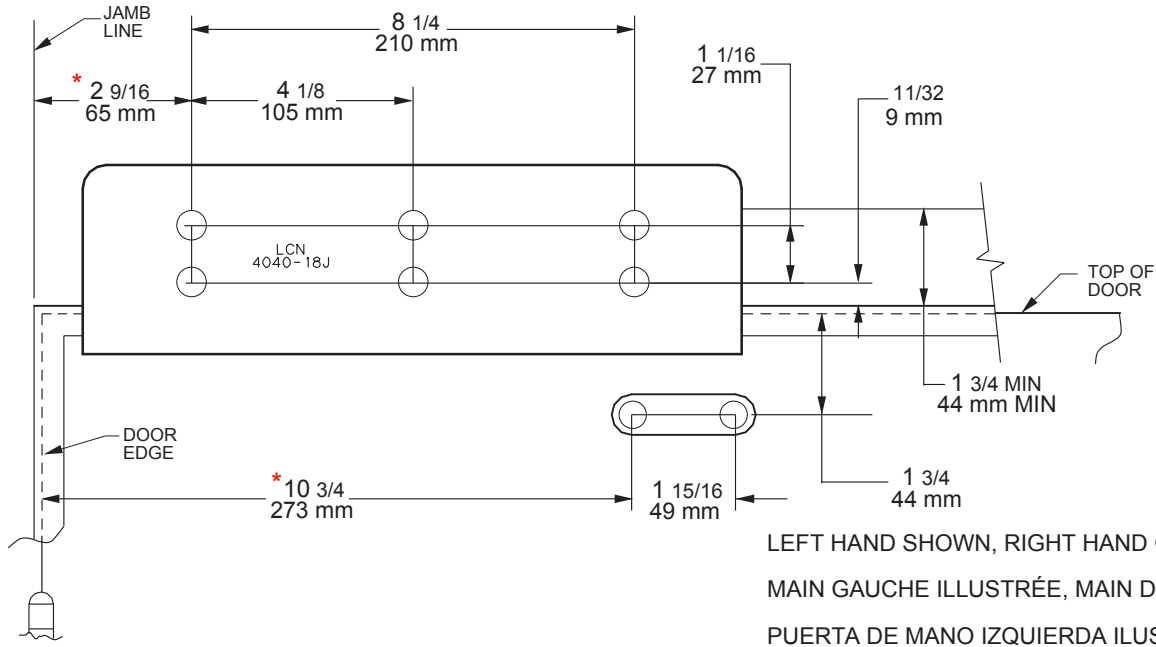


TOP JAMB MOUNTED ON 4040-18G ADAPTER PLATE

* Locate drop plate & shoe from centerline of pivot or swing clear hinge pin when used.

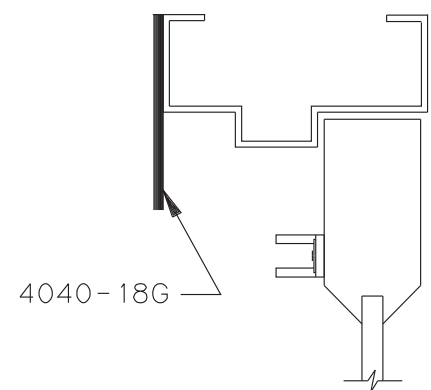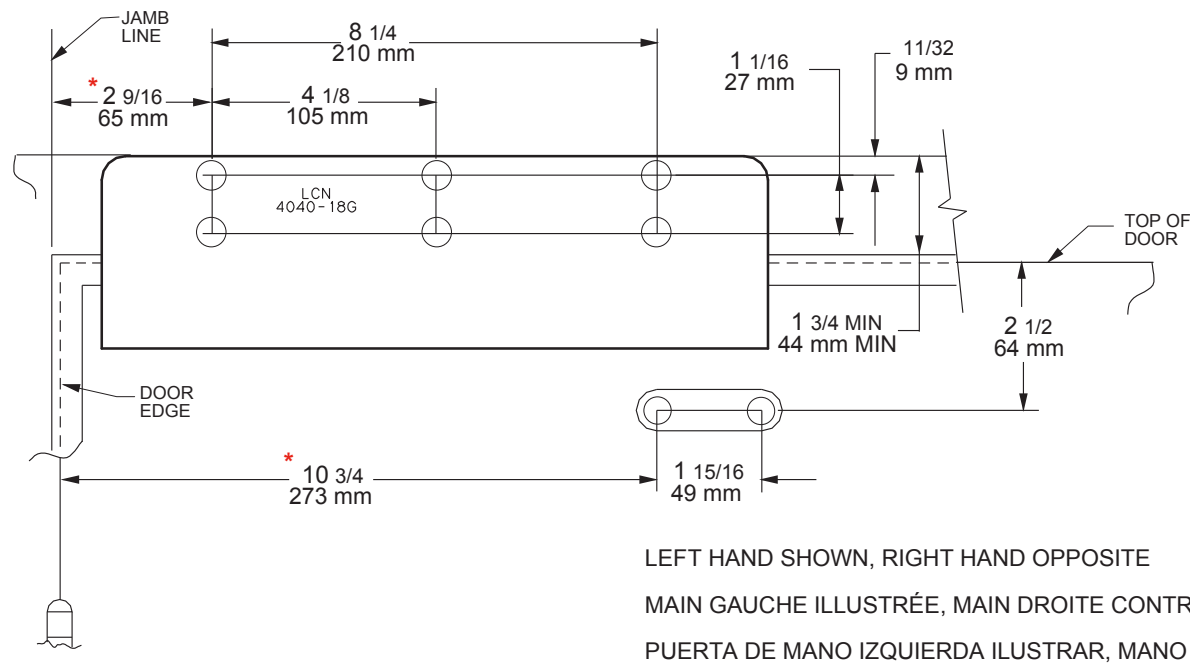

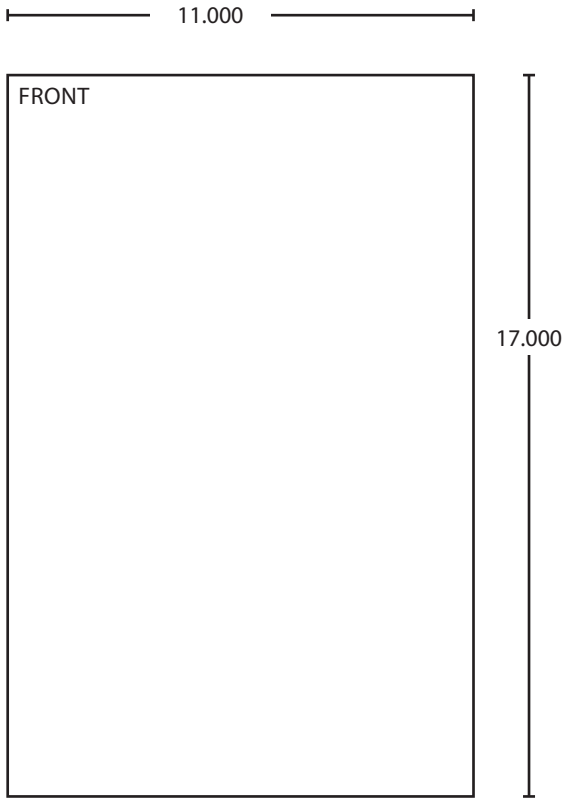

BEGINNING SHEET

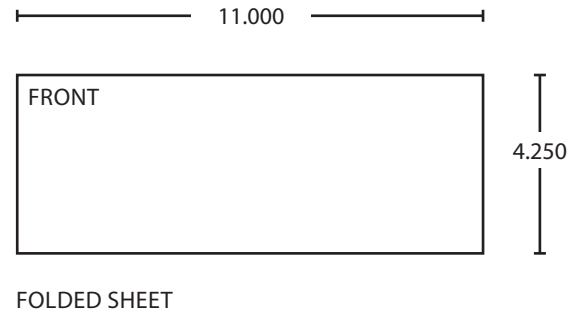

Additional Notes:
1. None

Revision History						Revision Description:					
U	V	W	X	Y	Z	U > Revised artwork					
042801											
Material						Edited By		Approved By		EC Number	Release Date
White Paper						D. Myers		M. Sasso		042801	01-01-14
Notes 1. printed two sides 2. printed black and PMS 485 (red) 3. tolerance ± .13 4. printed in country may vary 5. drawings not to scale						Title					
						4040XP/4041DA Top Jamb Push Side Instruction Sheet					
						Creation Date		Number			Revision
						04-27-10		28103			U
						Created By		Activity		© Allegion 2014	
						N/A		3899 Hancock Expwy Security, CO 80911			
						Software: InDesign CS6					